


Steri-Crete SLQ


SYSTEM INFORMATION SHEET

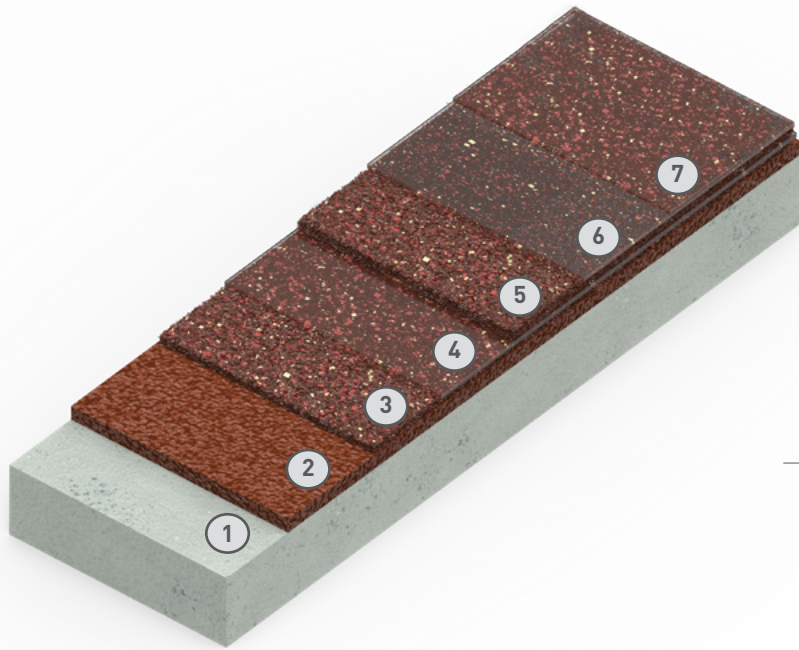

1/16 to 3/16-inch (2 to 5 mm)

SYSTEM STEPS

- ① Concrete Substrate
- ② Shock-Crete® SL2
- ③ Quartz Broadcast
- ④ Sealer 985
- ⑤ Quartz Broadcast
- ⑥ Sealer 985
- ⑦ Sealer 985 (optional)



FAST-SETTING

Fast setting time and low-temperature cure characteristics make for a flooring system that is easy to apply and quick to return-to-service.



CHEMICAL RESISTANCE

The Steri-Crete SLQ system is broadly chemical resistant and withstands exposure to various fuels, fluids, lubricants, and cleaning agents.



LOW-EMITTING

Steri-Crete SLQ is formulated with very low VOC content, promoting human and environmental health and helping to earn LEED 4.1 credits.

Steri-Crete SLQ

SYSTEM INFORMATION SHEET



PERFORMANCE DATA	TEST METHOD	RESULTS
	Abrasion Resistance (ASTM D4060)	50 mg loss
	Adhesion (ASTM D4541)	400 PSI (100% concrete failure)
	Coefficient of Friction (ASTM D2047)	Exceeds ADA recommendations
	Coefficient of Thermal Expansion (ASTM C531)	2.7×10^{-5} in/in/°F
	Compressive Strength (ASTM C579)	>7,250 PSI
	Flexural Strength (ASTM C580)	2,900 PSI
	MVT Resistance (ASTM F1869)	12 lbs/1,000 ft²/24hrs
	Tensile Strength (ASTM C307)	1,740 PSI
	*1,000 gm CS-17 wheel at 1,000 cycles	

SYSTEM STEPS	PRODUCT	THICKNESS	THEORETICAL COVERAGE RATE	PACKAGING	APPLICATION EQUIPMENT	RECOAT / DRY TIME*
Slurry	Shock-Crete SL2	3/32-1/8" (2.4-3.2 mm)	94 ft² at 3/32" per large kit (8.7 m² at 5 mm) 63 ft² at 1/8" per large kit (5.9 m² at 2 mm)	Part A Part B Filler Pigment Pack	Notched Squeegee/ Trowel / Looped Roller	16 hours (min) 24 hours (max)
The mixed product should be poured out evenly over the floor and then applied to the desired thickness with a notched squeegee, notched trowel, or gauge rake. Loop roll the material to aid leveling, air release, and to bring resinous material to the surface to accept broadcast media.						
Broadcast	Quartz (40-S)	n/a	0.5 lb/ft² (2.4 kg/m²)	50 lb (22.7 kg) bag	Hand Broadcast	n/a
Broadcast quartz aggregate into wet material until rejection. After coating has reached walk on cure time remove excess quartz aggregate and apply desired topcoat						
Groutcoat	Sealer 985	10-15 mils (250-375 microns)	102-152 ft² (2.5-3.7 m²/l)	Part A Part B	Flat Squeegee / Short Nap Roller	2 hours (min) 24 hours (max)
The mixed product should be immediately poured directly onto the floor in ribbons and spread to desired thickness with a flat squeegee. After spreading the material to the proper thickness, roll with a short nap roller to level.						
2nd Broadcast	Quartz (40-S)	n/a	0.5 lb/ft² (2.4 kg/m²)	50 lb (22.7 kg) bag	Hand Broadcast	n/a
Broadcast quartz aggregate into wet material until rejection. After coating has reached walk on cure time remove excess quartz aggregate and apply desired topcoat						
Sealer	Sealer 985	10-15 mils (250-375 microns)	102-152 ft² (2.5-3.7 m²/l)	Part A Part B	Flat Squeegee / Short Nap Roller	2 hours (min) 24 hours (max)
Optional 2nd Coat of Sealer	Sealer 985	10-15 mils (250-375 microns)	102-152 ft² (2.5-3.7 m²/l)	Part A Part B	Flat Squeegee / Short Nap Roller	2 hours (min) 24 hours (max)

Steri-Crete SLQ

SYSTEM INFORMATION SHEET



COVING

PRODUCT	GENERIC TYPE	THICKNESS	THEORETICAL COVERAGE RATE	PACKAGING	APPLICATION EQUIPMENT
Steri-Cove Gel	Thixotropic Epoxy	1/8" thickness (1" radius) at 4" height = 47 lineal ft (3 mm at 102 mm height = 14.3 m) 1/8" thickness (1" radius) at 6" height = 33 lineal ft (3 mm at 152 mm height = 10 m) 3/16" thickness (1" radius) at 4" height = 40 lineal ft (5 mm at 102 mm height = 12 m) 3/16" thickness (1" radius) at 6" height = 30 lineal ft (5 mm at 152 mm height = 9 m)		Part A Part B	Coving Trowel

Apply a tack coat of neat Steri-Cove Gel, then place mixed Steri-Cov Gel mortar at the floor to wall transition and smooth with a 1" radius coving trowel. Note: If the tack coat cures before the mortar is applied – re-apply tack coat. Use of plastic or metal termination strip at the top of the cove is recommended.

INSTALL

This document is meant as a guideline for the installation of the system. Contact Carboline Technical service for further assistance prior to the installation of the system.

SURFACE PREPARATION

Concrete must be prepared mechanically to remove surface laitance. Oils, grease, or other surface contaminants must be removed prior to surface preparation. Concrete must be free of curing compounds and form release agents. Abrade the surface to achieve an ICRI CSP 5 surface profile. The prepared surface should have a nominal tensile strength of 250 psi (1.72 MPa) per ASTM D7234. Filled joints and cracks in the concrete may be coated, but if movement occurs the coating will crack with the movement of the concrete.

Concrete substrates must be checked for moisture prior to product application using the Plastic Sheet Test, ASTM D4263. If moisture is found to be present, contact Dudick for further recommendations.

MIXING

Specific mixing instructions for each product can be found on its corresponding Product Data Page.



Dudick is part of Carboline
 1818 Miller Parkway
 Streetsboro, Ohio 44241
 1-800-322-1970

NOTE: The technical data presented in this document is accurate to the best of Dudick and Carboline's knowledge based on laboratory testing of the product(s) or system(s) described. Actual results in the field may vary depending on field conditions and application methods. The performance characteristics stated do not constitute a guarantee or warranty that the products will meet the stated results under all circumstances. Contact Dudick or Carboline technical staff with questions.

00-46-0724-D114